

## Wood Visuals




718 - Paprika

Repeat: 39.37" x 39.37"  
Drop: 12.50"



764 - Haystack

Repeat: 39.37" x 39.37"  
Drop: 39.37"




796 - Driftwood

Repeat: 39.37" x 39.37"  
Drop: 19.69"



818 - Brandy Oak

Repeat: 39.37" x 39.37"  
Drop: 19.69"



819 - Buckskin

Repeat: 47.24" x 39.37"  
Drop: 25.59"



861 - Wool Oak

Repeat: 39.37" x 47.24"  
Drop: 19.69"



868 - Caramel Oak

Repeat: 39.17" x 47.24"  
Drop: 19.69"



895 - Drawbridge Oak

Repeat: 39.37" x 39.37"  
Drop: 19.69"

## Tile Visuals



533 - Sandstone

Repeat: 39.17" x 47.24"  
Drop: 19.58"




591 - Silver Screen

Repeat: 39.37" x 39.37"  
Drop: 25"



917 - Ember Forest

Repeat: 39.37" x 39.37"  
Drop: 15.75"

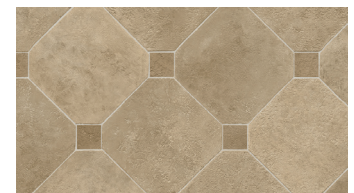

932 - Imperial Sands

Repeat: 39.37" x 39.37"  
Drop: 13.12"



933 - Almond Spice

Repeat: 39.37" x 39.37"  
Drop: 15.75"



944 - Vanilla Spice

Repeat: 39.17" x 47.24"  
Drop: 19.58"



996 - Wet Sand

Repeat: 39.37" x 39.37"  
Drop: 39.37"



# Divinity

## Performance Advantages:

- Fiberglass "lay flat" product – will not curl, crack or expand
- Moisture/Mildew resistant – will not stain from subfloor moisture
- Outstanding sound transmission characteristics
- Compact backing results in strong, rip, tear & gouge properties
- Made using green practices and is FloorScore® certified

## Installation Advantages:

- Ease of handling & repair – no need for full floor replacement
- Releasable, pressure sensitive adhesive provides life cycle savings
- Simply remove existing material & reuse adhesive
- No required toilet removal & associated costs

## Specifications

Construction .....	Sheet Vinyl	Width .....	12'
Recommended Usage .....	Builder/Multifamily	Standard Length .....	120 Lineal ft.
Thickness .....	65 Gauge	Average Roll Weight	416 lbs
Wear Layer .....	10 Mils	Warranty: Limited 10 yr Builder/ Multifamily	
	Urethane Finish		

## Warranty Information

### Limited 10 year Builder/Multifamily Warranty

For the designated warranty period when properly installed in accordance with Mohawk Installation Instructions and under normal household use\*, your Mohawk Flooring is warranted to be:

- Free from manufacturing defects
- Contract and expansion resistant
- Curl-crack-rip-tear-gouge resistant
- Moisture resistant
- Mold and mildew resistant
- Scuff resistant
- Household stains resistant
- Resistant to yellowing from foot traffic (and asphalt traffic)
- Wear resistant

*\*Normal household use is defined as common daily activities in the home, excluding pet damage such as chewing, digging, clawing, etc.*

The Releasable Full Spread Installation Method using pressure sensitive adhesive is the required installation process for all fiberglass sheet vinyl products. This installation method provides optimal performance of the

vinyl. For complete warranty information and exclusions, please refer to the full Mohawk Flooring Limited Warranty Conditions and Owner Obligations.

*Note: Gypcrete can be utilized when necessary due to radiant heat and in high rise buildings. Gypcrete must be sealed with a latex flooring primer coating to stabilize the surface for adhesive bond. All issues with gypcrete cracking, crumbling, powdering and resulting in the release of adhesive bond are NOT warranted by Mohawk.*

## Care & Maintenance

Mohawk recommends using our Floorcare Essentials Hard Surface Cleaner

For complete information please consult the Installation, Care & Maintenance, Warranty Manual or visit [www.mohawkflooring.com](http://www.mohawkflooring.com)

Mohawk Industries Inc. Questions? Please call:  
160 South Industrial Blvd 888-387-9881 option #3  
Calhoun, Georgia 30701

## Testing Information

ASTM I303 .....	Type I, Grade 3
ASTM F1914 Residual Indentation .....	0.006 in
ASTM F137 Flexibility .....	10 mm Passes
ASTM F1514 Resistance to Heat .....	Passes
ASTM F1515 Resistance to Light .....	Passes
ASTM F925 Resistance to Chemicals .....	Very Good
ASTM C 1028-96 Static Coefficient of Friction .....	Dry 0.81 / Wet 0.79
ASTM E492-09 Sound Transmission / Impact Insulation .....	Class IIC 55
ASTM E648-08 Radiant Flux of Floor Covering .....	Class I
ASTM E662-03 Smoke Density (flaming) .....	Passes 450 or less
ASTM E662-09 Smoke Density (non-flaming) .....	Passes 450 or less

## Adhesives and Seam Sealer

Style	Description	Spread Rate
VP65 Adhesive	Mohawk M640 - 4 gallon	300 sf/gal*
VP65 Adhesive	Mohawk M640 - 1 gallon	300 sf/gal*
VP7 Seam Sealer	Mohawk M7 - 8 oz	100 LF with 1/8" bead
VP7 Seam Sealer	Mohawk M7 - 1 quart	400 LF with 1/8" bead
VP23 Primer	Mohawk Prime Coat - 4 gal	315-360 sf/gal

\*with 3/8" short nap paint roller



## Water Conservation

- We use a closed loop system to purify all water used during production and recycle it back into our manufacturing process.

## Clean Air

- Thanks to Mohawk's clean air flow and careful choice of raw materials, our facility's emissions are 250% lower than industry standards.

## Solar Power

- Our 454 panel solar energy system produces enough energy to fully power our fleet of electric lift trucks.

## Recycling

- Our recyclable sheet vinyl scrap is locally processed into automotive floor mats.
- All our inks are water based and can be recycled and reused.
- Our factory is able to reclaim heat energy from our manufacturing process and recycle it back into our production process.



Made in the  
**USA**



This flooring meets U.S. Government standards specified in FIA Bulletin UM44-D. This certification does not constitute an endorsement of this flooring by any agency of the U.S. Government.