

FlexStep Good "Product Information"

Floor Covering Information \ Sheet - Residential\FlexStep Good "Product Information"

Product Status: Product Information

Product Status Date: 07/2011

Warranty:	10-Year Limited Residential Warranty
Gauge:	Overall Thickness .065" (65 mils)
Width:	12 feet (3.6 m)
Use:	Residential
Shipping Weight:	2.6 lbs/sq yd
Gloss:	Low Gloss

Installation

<i>Location:</i>	All grade levels
<i>System:</i>	Fiberglass-Reinforced Sheet Flooring Installation System (S-289 Releasable Adhesive Installation System).
Pattern Match:	Yes; do not reverse pieces (TM edge to non-TM edge)
Seams:	Double-cut seams <u>Do not use S-585 Seam Cleaner prior to coating seams.</u> S-564 Low Gloss Seam Coating Kit (Disc. 12/3/12) or S-761 Seam Adhesive
<i>Fitting:</i>	All methods
Adhesives:	Acrylic double-faced tape for modified loose lay method; Armstrong S-288 adhesive for the Full Spread Installation Method Armstrong S-289 when using the S-289 Releasable Adhesive Installation System
<i>Packaging:</i>	Roll Size: 180 sq yds Max




Special Precautions and Recommendations:

1. Always check roll label for pattern match.
2. **Do not use S-585 Seam Cleaner**
3. The modified loose lay method requires that the flooring be cut 1/4" 6.4 mm away from walls, cabinets, etc.

PRODUCT BENEFITS:

- Durable and easy to maintain urethane wear layer - provides superior stain resistance
- Remarkable print clarity and depth of color & embossing
- Fiberglass backing
- MasterWorks Technology
- CushionCore
- Urethane Wearlayer
- Toughguard Performance

FLEXSTEP GOOD STRUCTURE

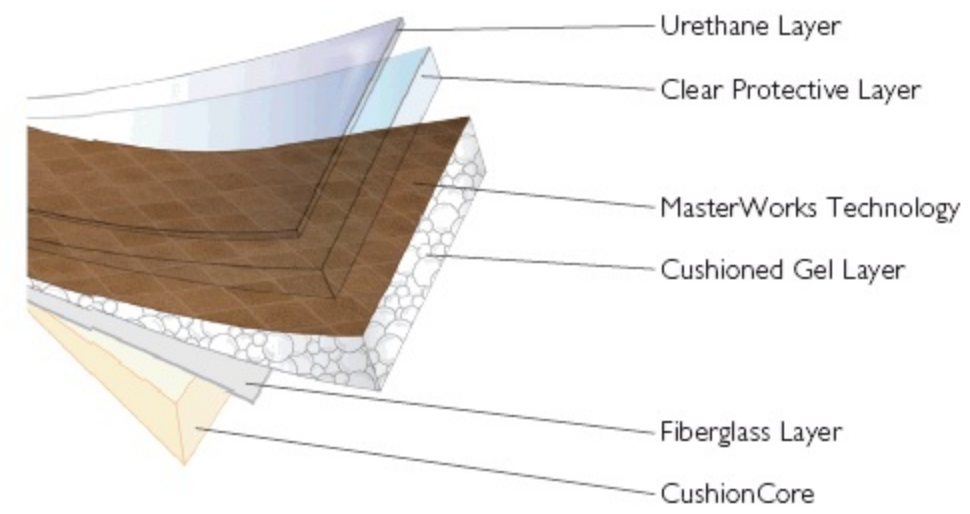

Maintenance Products:

- Cleaner: [Once 'n Done](#)
- Deep Cleaning Stripper: [New Beginning](#)
- Gloss Finish: [Shinekeeper](#)
- Matte Finish: [Satinkeeper](#)

Maintenance Guidelines:

[Residential Maintenance Guidelines](#)

REFERENCE SPECIFICATIONS: [ASTM F 1303](#), Type I, Grade 3, Class C Backing

Complies with the requirements for floor coverings set forth in the HUD Minimum Property Standards for Housing (MPS 4910.1) for light traffic areas as referenced by ASTM F 1303, Type 1, Grade 3, Class C Backing. No longer our previous designations of "meets HUD/FHA requirements".

FIRE TEST DATA: [ASTM E 648](#) Critical Radiant Flux - 0.45 watts/sq. cm. or more - Class I

Manufacturing Location: Lancaster, PA

MSDS: [Resilient Sheet MSDS](#)

LEED/Environmental:

- [LEED Credit Information - Residential](#)
- [Vinyl Sheet Sustainable Design Information](#)
- [FloorScore Certificate](#) - Contributes towards sustainable building practices and LEED for Homes MR2.2.
- [Armstrong Flooring Sustainability](#)