



HOME FOUNDATIONS FLOORING

Sundries

GroundWorks
Acoustical Underlayment

Style 157VS


Acoustical Underlayment that reduces sound transmission from one floor to another. Ideal for use with luxury vinyl plank and hardwood floors.

FEATURES

- Excellent sound suppression
- Resists Mold and Mildew
- No risk of plasticizer migration with recommended Shaw adhesives
- Decreases step sound in rooms
- Suitable over concrete, wood, and gypsum subfloors
- Extends wear warranty on Shaw Luxury Vinyl Plank floors an extra 5-years
- Recommended for floating or double-glue
- GREENGUARD Indoor Air Quality Certified®

SUGGESTED APPLICATIONS


- Multi-family housing
- Student housing
- Senior Living facilities
- Military housing

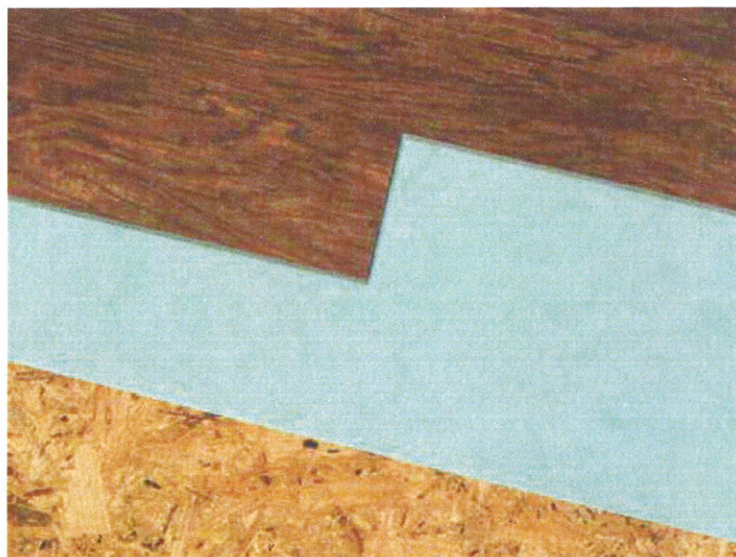

SPECIFICATIONS

| | |
|--|----|
| Impact Insulation Class (IIC) rating (ASTM E492-09/E989-06) | 71 |
| <i>Test conducted using Shaw Array™ 2mm LVP glued to GroundWorks underlayment glued to 6" concrete slab floor</i> | |
| Impact Insulation Class (IIC) rating (ASTM E492-09/E989-06) | 51 |
| <i>Test conducted using Shaw Array™ 2mm LVP glued to GroundWorks underlayment glued to 3/4" Gyp-Crete® on 12" wood I-Joist</i> | |
| Sound Transmission Class (STC) rating (ASTM E90-04/E413-10) | 55 |
| <i>Test conducted using Shaw Array™ 2mm LVP glued to GroundWorks underlayment glued to 3/4" Gyp-Crete® on 12" wood I-Joist</i> | |
| Field Impact Insulation Class (FIIC) | 54 |
| <i>Test conducted using Shaw Array™ 3mm locking-LVP over GroundWorks underlayment on 1" Gyp-Crete® over 12" wood trusses</i> | |
| Field Sound Transmission Class (FSTC) | 59 |
| <i>Test conducted using Shaw Array™ 3mm locking-LVP over GroundWorks underlayment on 1" Gyp-Crete® over 12" wood trusses</i> | |
| Field Impact Insulation Class (FIIC) | 52 |
| <i>Test conducted using Shaw Array™ 2mm glued to GroundWorks underlayment glued to 1" Gyp-Crete® over 3/4" plywood on 12" wood trusses</i> | |
| Field Sound Transmission Class (FSTC) | 61 |
| <i>Test conducted using Shaw Array™ 2mm glued to GroundWorks underlayment glued to 1" Gyp-Crete® over 3/4" plywood on 12" wood trusses</i> | |

| | |
|----------------------------|-------------------------------|
| Roll size | 100 Sq Ft (Roll = 3' x 33'4") |
| Thickness | 1.4mm |
| Roll Weight | 13 lbs. |
| Rolls per pallet | 80 rolls per pallet |

 Sustainability Through Innovation™
That's the Shaw Green Edge |.



Installing GroundWorks Underlayment with any Shaw Array™ luxury vinyl plank or tile will extend that product's wear warranty an extra 5-years.

carpet | area rugs | tile & stone | hardwood | laminate | resilient | shawfloors.com

HS-0249-12_Hushll_©2012 Shaw

Shaw Industries, Inc.
PO Drawer 2128, Mail Drop 02601
Dalton, GA 30722-2128
1-800-441-7429