

Timber Grove 8

R
RESILIENT

TIMBER GROVE
style I342V

ARROWROOT
color 00200

patcraft®

Patcraft's LVT resilient plank flooring is engineered for performance. Designed for residential installations, Timber Grove 8 is manufactured to provide the visual of hardwood flooring that is suitable for housing, dorms, assisted living and other light end use installations. Durability, wear retention, longevity and many other performance requirements drive Patcraft product design so you know when you specify Patcraft, you specify performance.

because flooring matters.

Timber Grove 8

Features and Benefits

- Beautiful resilient designed for residential environments.
- ExoGuard™ Quartz Enhanced Urethane finish and 8 mil wear layer ensures performance in a variety of residential applications.
- 15 year residential / 5 year light commercial wear warranty.
- High performance matte finish is polish and buff optional for hassle free maintenance.
- FloorScore® certified for low VOCs.
- Recommended Applications: residential end use applications including multi-family housing, assisted living and student housing

Product Specifications

| | |
|-------------------------|---|
| Style Name | TIMBER GROVE 8 |
| Style Number | I342V |
| Construction | LVT |
| Wear Layer | 8 mil |
| Wear Layer Thickness | .008" (0.2 mm) |
| Overall Thickness | .078" (2.0 mm) |
| Reference Specification | Class III printed film vinyl plank Type B (embossed) |
| ASTM F 1700 | |
| Finish | ExoGuard™ Quartz Enhanced Urethane |
| Installation | Glue Down |
| Recommended Adhesive | Shaw 4100 or S150 |

Packaging

| | |
|----------------------|----------------------|
| Plank Size | 6" w x 48" l nominal |
| Pieces/Box | 27 |
| Sq. Ft./Box | 53.63 |
| Weight (Lb./Box) | 37.6 |
| Weight (Lb./Sq. Ft.) | .70 |

Warranty

15 year residential wear warranty and 5 year light commercial warranty
Please visit patcraft.com for the most current warranty information

Performance Testing

| | |
|--------------------------------------|------------------------|
| Commercial Traffic Class | General Domestic |
| Slip Resistance / ASTM D 2047 | Passes |
| Static Load / ASTM F 970 | 1500 psi (lbs/sq. in.) |
| Residual Indentation / ASTM 1914 | Passes |
| Dimensional Stability / ASTM F 2199 | Passes |
| Flexibility / ASTM F 137 | Passes |
| Resistance to Heat / ASTM F 1514 | Passes |
| Resistance to Light / ASTM F 1515 | Passes |
| Resistance to Chemicals / ASTM F 925 | Passes |
| Radiant Flux / ASTM E 648 | Passes, Class I |
| Smoke Density / ASTM E 662 | Passes |


Environmental

| | |
|--------------------|-----------------------|
| Indoor Air Quality | FloorScore® certified |
|--------------------|-----------------------|

Maintenance

Patcraft resilient products do not always require a floor finish. However, in certain applications a floor finish may be desirable to aid in stain resistance, resistance to abrasion or increased gloss level.

Construction

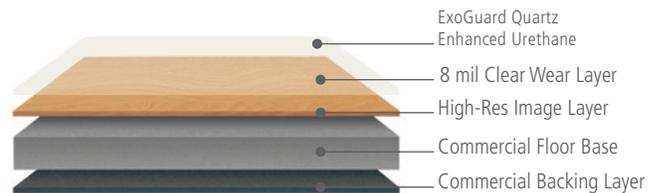

Installation

(see patcraft.com for complete installation instructions)

- Flooring material and adhesive must be acclimated to the installation area for a minimum of 48 hours prior to installation.
- ASTM F 2170 IRH (Internal Relative Humidity) are required for warranty coverage. Three tests must be conducted for areas up to 1000 sf, and one additional test for each additional 1000 sf. 4100 Adhesive/S150 may not exceed 90 RH.
- pH of concrete sub-floor must not exceed 10.
- Patcraft LVT is installed using conventional tile installation techniques.
- Use Shaw S150 spray adhesive or Shaw 4100 and a 1/16" w x 1/32" d x 1/32" I U-notch trowel to permanently install resilient flooring.
- In most cases, wait 10 minutes before placing the tile into the adhesive, before the adhesive has had an opportunity to dry. Good transfer of adhesive to the backing of the tile is essential for proper bond.
- Material should always be visually inspected prior to installation. Any material installed with visual defects will not be considered a legitimate claim as it pertains to labor costs.

Swatches



HINTERLAND
00103



ARROWROOT
00200



PRAIRIE
00256



SHRUBBERY
00517



JUNIPER
00535



HEDGEROW
00548



MOORLAND
00558



HEMLOCK
00590



LAUREL
00684



VINEYARD
00700



THICKET
00729



BRIAR
00740



ALPINE
00750



FRONTIER
00755



BOXWOOD
00766



BRAMBLE
00790



CARAWAY
00830



HEATHLAND
00850

